



MTM TELECOM



MTM TELECOM
www.mtm-telecom.com
ventas@mtm-telecom.com
Tel. 5512098404 ext. 1001



LINK IP iDP

Tested on several IPBX manufacturers (Cisco Call Manager, Alcatel Omni PCX, Asterisk, Nexspan, Panasonic ...), the Link IP iDP integrate easily any IPBX supporting SIP v2.

The IP iDP complies with the «Access for the disabled» law :

It has pictograms noticeable with coloured LEDs which signal an incoming call, communication in progress and the door opening, with an audible message alert.

It has also an induction loop system.

BENEFITS

- + SIP Doorphone compatible with IPBX supporting SIP v2
- + Peer-to-Peer and SIP Server modes supported
- + Audio Codec : G.711, G.729, G.722 ...
- + Web-based management
- + 1 to 4 buttons
- + 1 Relay
- + PoE support
- + Vandal-resistant casing (embedded or surface)
- + Create illusion of presence (for burglars)
- + Full Duplex
- + Multicolor lens surface*




MTM TELECOM

Features	
Controlrelay	1
Relay	DTMFCodeorHTTP protocol
Signalisation	SIPv2
Mode	SIPServeretP2P
NumberofSIPaccounts	2
AudioCodecs	G.711,G.729,G.722, G.723,G.726
Protocols	IP,TCP,UDP,HTTP,SIP, RTSP,NTP,...
DTMFMode	RFC2833etSIPInfo
Administration	Web(http)
Network	-VPNL2TPSupport/Open VPN -Firewall -VLAN -QoS -EncryptionSIP
Compatibility	TestedonCisco,Call Manager,AlcatelOMNI PCX,Asterisk,Nexpan, Panasonic...
Interface	LAN10/100Base-Tx,RJ45
Operatingtemperature	-20° à+70°
Dimensions	190x115x35mm
Supply	•PoEclass1 •Soit12VD
Consumption	Max300mA
Relayvoltage	48Vforlessthan1A
Relaypower	2Aforlessthan30V
Ingressprotection	IP44

MTM TELECOM
www.mtm-telecom.com
ventas@mtm-telecom.com
Tel. 5512098404 ext. 1001



MTM TELECOM

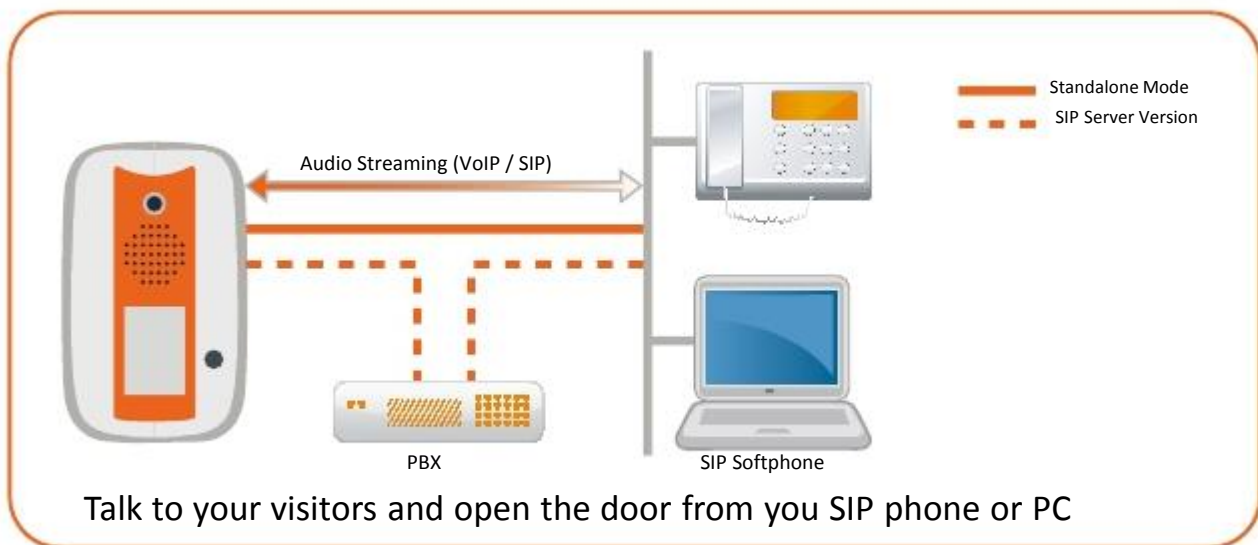

MTM TELECOM
www.mtm-telecom.com
ventas@mtm-telecom.com
Tel. 5512098404 ext. 1001